




New Battery Shape



Highest Level of Protection

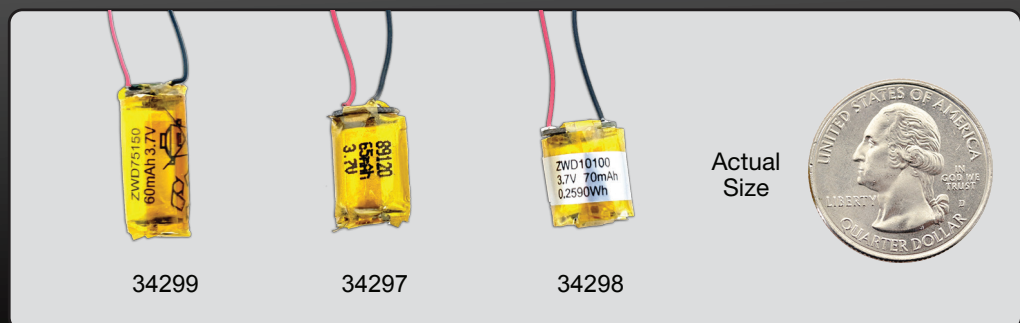

Premium Protected Industrial Li-ion Rechargeable Cell

Built-in internal protection board provides protection against overcharge, over discharge, overcurrent and short circuit. With the greatest safety standards for product integration and commercial use during normal and in case of fault conditions of your application.

For Your Product or Next Design. Easy Drop-in Integration



Network Security



Medical Devices



Internet of Things



Augmented/
Virtual Reality



Artificial Intelligence



Industrial Applications

SPECIFICATIONS

Part Number		34297	34298*	34299
Battery Type		Li-ion Polymer Rechargeable Cylindrical Battery		
Voltage		3V ~ 4.2V		
Min. Capacity		65mAh	70mAh	60mAh
Max. Charging Current		0.7C	1C	1C
Max. Discharge Current		1.5C	1C	1C
Cycle Life		>500 (Fully charge and discharge)		
Dimensions (mm)	Cell:	8.9 x 12.5	10 x 10	7.5 x 15
	With PCM	8.9 x 15	10 x 12	7.5 x 17.5
Operating Temperature		Charging: 0 - 45°C Discharge: -20 - 60°C		
Applications		Wearable devices, headset, etc.		

*Item 34298 has IEC62133(CB), KCC and UN38.3 certifications.



Scan QR code for full product specification sheet.