




3.7V 60mAh 1254 Li-polymer Coin Cell



New Battery Shape



Highest Level of Protection

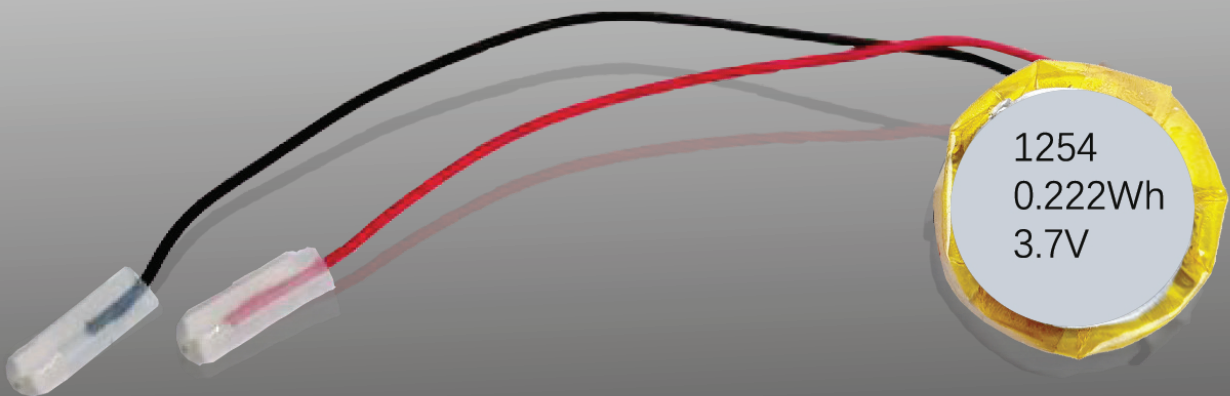

Premium Protected Industrial Li-ion Rechargeable Coin Cell

Built-in internal protection board provides protection against overcharge, over discharge, overcurrent and short circuit. With the greatest safety standards for product integration and commercial use during normal and in case of fault conditions of your application.

For Your Product or Next Design. Easy Drop-in Integration



Network Security



Medical Devices



Internet of Things



Augmented/
Virtual Reality




Artificial Intelligence



Industrial Applications

SPECIFICATIONS

Part Number	34294
Battery Type	Li-ion Polymer
Voltage	3V ~ 4.2V
Min. Capacity	60mAh
Max. Charging Current	1C
Max. Discharge Current	1C
Cycle Life	>400 (Fully charge and discharge)
Dimensions	Max. 12.5 x 5.8mm
Operating Temperature	Charging: 0 - 45°C Discharge: -20 - 60°C
Applications	Wearable devices, headset, etc.



Scan QR code for full product specification sheet.



email: IAD@Tenergy.com

www.TenergyBattery.com